

**KOZY HEAT**
FIREPLACES

Gas Insert

NEW!



Chaska 25 shown standard w/shroud

**MODEL
CHASKA 25**

Chaska 25 Options & Specs

The Chaska 25 model (Electronic Ignition) comes standard with refractory brick lining, remote modulating valve system w/ flame & fan adjustment. (remote control & fan kit included)

Features

- 26,000 BTU/hr Input - NG & 25,500 BTU/hr Input - LP
- High efficiency: NG - 78% LP Gas - 78%
- Canada P-4 approved
- Electronic ignition (standing-pilot as well)
- High quality, quick-latch lifetime ceramic glass: (14¼" x 24")
- Log set
- Remote control (full function)
- Fan kit - 75 CFM
- Refractory brick lining
- Upper hood & lower grill
- Co-linear air duct - accepts 3" combustion air / 3" exhaust
- Innovative vent connection system
- Patented log design
- Engineer-designed burner system
- Minnesota Energy Code compliant to 50 pascals

Optional Features

- 3 pc. or 4 pc. standard and custom size shrouds
- Rectangular Prairie/Arched Prairie pattern full door shrouds
- Refractory overlay - black enamel panels

Safety

- **Each unit factory tested!**
- Tested by OMNI-Test Laboratories
Complies with ANSI-Z21.88B-2005 • CSA 2.33-2005
'Vented Gas Fireplace Heaters'
- U.S. & Canadian installation approved
- Sealed combustion chamber with standing pilot ignition
- Removable control board with 30-second safety pilot
- Battery back-up
- Automatic pressure relief glass system
- Bedroom & mobile home approved

Clearances

- From insert bottom to combustible floor in front*
*Refer to Hearth Protection chart in the installation manual
- From insert to sidewall..... 3"
- Mantel 9" deep from top of insert**..... 9"
** Refer to Mantel Requirements in the installation manual.

Vent Systems & Requirements

This fireplace is approved for use with the following Co-Linear Flexible Vent Systems:

- Kozy Heat™ #816 Co-linear vent flexible termination kit
- Simpson Dura-Vent™ DV-GS - 3" x 3"
- Selkirk Metalbestos™ direct chimney system - 3" x 3"
- AmeriVent System™ - 3" x 3"
- ICC/EXCEL Direct™

Vertical Terminations Only

Minimum: 10'
Maximum: 35'

NOTE: Refer to the 'Chaska 25' installation manual for complete installation & venting requirements.

Specifications

Height	17-1/2"
Height at back	12-1/4"
Front width	25-3/8"
Back width	20-3/8"
Depth	15"
Weight	140 lbs.



Existing Requirements

Existing Fireplace Opening:


Height	17-5/8"
Front width	25-7/8"
Back width	20-5/8"
Depth	15 1/4"

Existing Chimney Requirement:


Class 'A' Metal:	7" I.D.
Masonry Chimney:	6" x 8" I.D.
Minimum Chimney Height:	10'
Maximum Chimney Height:	35'

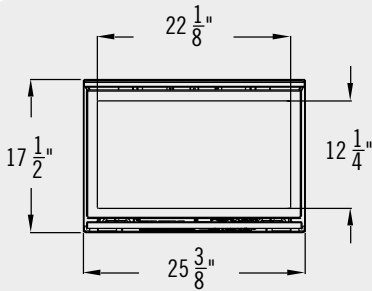

Top



Left



Right

Rectangular Prairie pattern
full door shroud



In order to continually provide the highest quality product available, features/options, specifications & dimension change. Refer to the unit installation manual for complete installation instructions. Installation must conform w codes. In some regions it may be possible that this appliance qualifies for an energy rebate. See your local dealer regarding promotions and qualifications.

NC BASED & FAMILY OWNED SINCE 1930



- Advance 336.998.9748
- Boone 828.262.3637
- Elkin 336.835.3607
- Millers Creek 336.973.2411
- Mills River 828.891.7371
- Pilot Mountain 336.368.3678
- Sparta 336.372.4443
- Statesville 704.873.4747
- Weaverville 828.645.1007



www.gbenergy.com

fireplaces . heaters . grills . outdoor living
tankless hot water . boilers . awnings

Manufactured by Hussong Mfg. Co. Inc.
204 Industrial Park Drive, Lakefield, MN 56150
9-12 Phone 1-800-253-4904 www.kozyheat.com

